


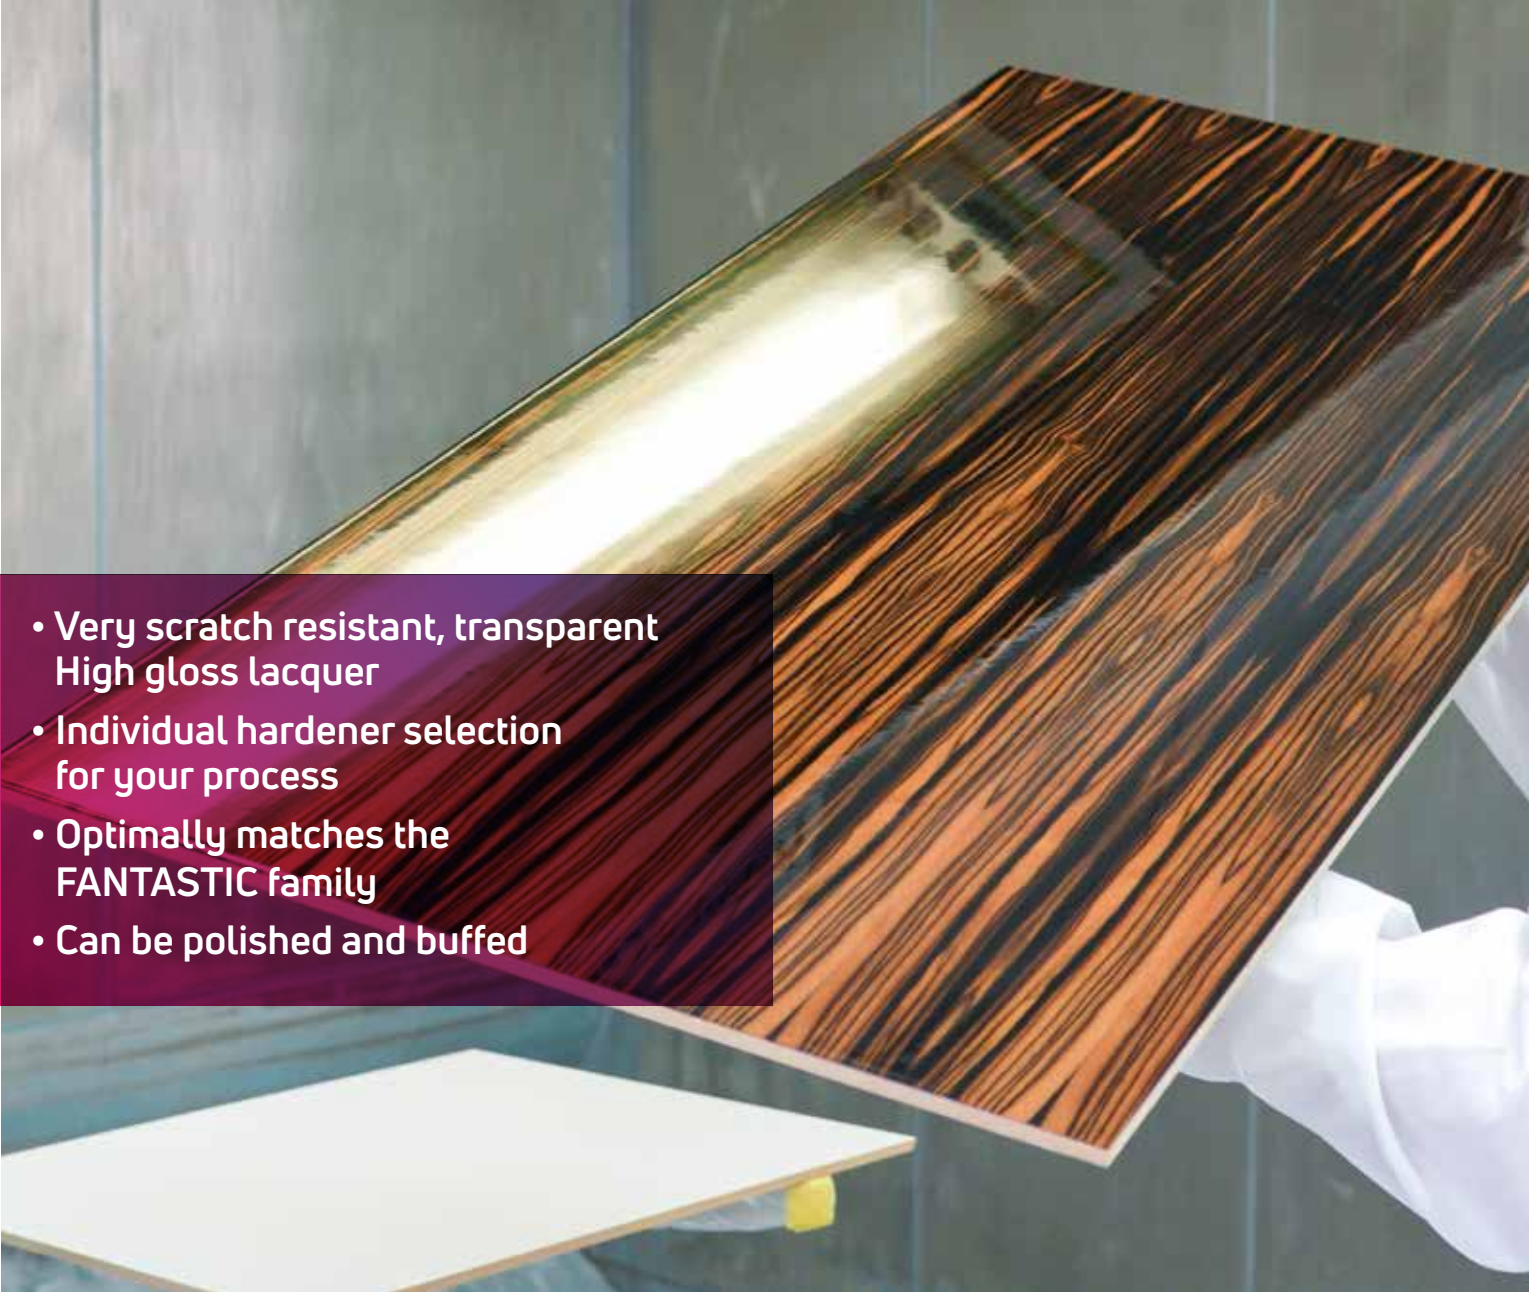

**Hesse Lignal**  
inspiring you

# **FANTASTIC-BRILLANT** **with individual** **characteristics**

Flexible – Fantastic – Brilliant

- 
- Very scratch resistant, transparent  
High gloss lacquer
  - Individual hardener selection  
for your process
  - Optimally matches the  
FANTASTIC family
  - Can be polished and buffed



# FANTASTIC-BRILLANT DU 48799

- Ideal adjustment to all process conditions due to six hardening options
- **NEW:** Finish to FANTASTIC-COLOR

Our FANTASTIC-BRILLANT rounds off the FANTASTIC family in terms of high gloss. It can be used as clear top coat on bare woods that already have a basecoat or to recoat onto FANTASTIC-COLOR. FANTASTIC-BRILLANT is by default hardened using PU Hardener DR 4071.

Can be used for shopfitting or on all interior fittings, including in kitchens, bathrooms and the fitting out of ship interiors\*.

A variety of further hardening options offer the possibility of influencing product properties and existing process conditions. FANTASTIC-BRILLANT can for instance be applied with faster drying, less dust incursion or with higher chemical resistance.

\*Certification according to IMO is pending.

## Flexible – Fantastic – Brilliant

	Result	Hardener	Mixture	Note
	Externally certified	DR 4071	(By volume) 4 : 1 (By weight) 100 : 26	Hardened using standard hardener for the FANTASTIC family. Low flammability according to IMO and DIN EN 13501 is pending.
	Universal hardening	DR 4070	(By volume) 2 : 1 (By weight) 100 : 49	For applications without specific requirements.
	High chemical resistance	DR 4078	(By volume) 5 : 2 (By weight) 100 : 40	Top chemical resistance compared to the other hardening variants.
	Highest quality	DR 4076-0001	(By volume) 10 : 3 (By weight) 100 : 31	Best values in terms of lacquer sanding, scratch resistance, brilliance and polishing capability.
	Fastest high gloss finish	DR 4085	(By volume) 3 : 1 (By weight) 100 : 35	Fastest high gloss finish among the hardening options. High gloss surfaces in just a few hours.
	Lowest dust incursion	DR 4096-0002	(By volume) 2 : 1 (By weight) 100 : 50	Very fast surface drying. Therefore very resistant to dust incursion. Ideal in the event of non-optimal conditions for high gloss coating.



<b>Order number:</b>	
FANTASTIC-BRILLANT High gloss	DU 48799
Gloss level 85 ° (gloss)	≥ 90
Packaging size	5 l, 25 l



**Hesse Lignal**  
inspiring you

Hesse GmbH & Co. KG  
Warendorfer Str. 21  
D-59075 Hamm

Tel. +49 2381 963 00  
Fax +49 2381 963 849

info@hesse-lignal.de  
www.hesse-lignal.com



More information on  
**FANTASTIC-BRILLANT**



Inspire your  
customers with  
the surface effects  
obtained using  
our **FANTASTIC**  
lacquers: quickly  
order your free original sample  
in an impressive A4 format.

